

Perforated Tool Cupboards



Sizes Available

Floor Standing Cupboard:

1800Hx900Wx460Dmm

Wall-Mounted Cupboard:

570Hx850Wx255Dmm




Paint Finish

A three-stage pre-treatment and phosphate coating are applied.

Carcass and doors are powder-coated with one coat of epoxy polyester full gloss powder, stoved at 180deg, including our germ guard anti-bacterial compound.

The carcass colour is powder-coated with - Light Grey - RAL 7035.

Door colour options include - Dark Blue RAL 5017, Light Grey RAL 7035, Green RAL 6024, Red RAL 3003, Light Blue RAL 5012 and Yellow RAL 1018.

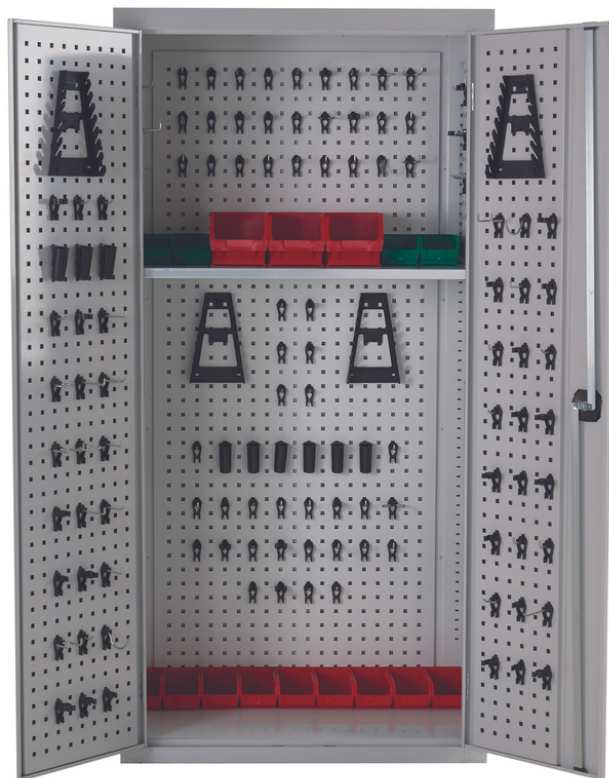

Cleaning & Maintenance

Clean paint work periodically with warm soapy water or foaming cleaner. Oil hinges and lock sparingly as required with a light oil (3in1 or similar).



Delivery Lead-Time

This is a manufactured-to-order item and will be on an extended lead-time.



Replacement Locks & Spare Keys

Replacement locks and keys are available from QMP. Replacement keys are available from Fast Key Ltd www.fastkeys.co.uk - sales@fastkeys.co.uk.



www.qmp.uk.com



01384 899800



sales@qmp.uk.com

Perforated Tool Cupboards



Cupboard Construction

General Construction:

- 0.7mm mild steel, pop riveted carcass construction.
- The door aperture has return bends to eliminate open gaps.
- Delivered as a fully assembled unit.
- Reaction to Fire Classification EN 13501-1 – supporting documents are available from our sales or marketing team.
- Rust-resisting galvanised shelves - weight load of 50 KG udl.
- Fitted with "no snag" 2-point locking mechanism.
- Perforated back panels and door panels are ideal for use with our clip mix kits for hand tool storage.
- Additional adjustable galvanised shelves and clip mix kits are available.

Cupboard Door Construction:

- Material: 0.9mm Mild Steel
- A stiffener is spot-welded vertically in the centre of the door. Two 2½" butt hinges are spot welded to the door. The door is attached to the carcass via the hinges, with 4.8mm pop rivets. The door has two-point locking with an all-metal key-locking handle. A series of square holes 20mm x 20mm are punched in the door to create the perforation. With perforated door panels suitable for use with our clip mix kits.



Our live chat satisfaction rating,
based on user feedback



www.qmp.uk.com



01384 899800



sales@qmp.uk.com

