# FIRECHIEF 9V BATTERY SMOKE DETECTOR

FIRECHIEF®
making the world a safer place

MODEL:
## FBSD1

### Features

- Test button verifies battery and alarm operation
- Low battery indicator
- 3 Year warranty
- Fully certified to EN14604
- Supplied complete with battery
- Dimensions Ø100mm x 36.7mm
- Photo-electric detection method
- Sound output 85 dB @ 3 metres




FBSD1
117-1098

EN 14604:2005/AC:2008
LPCB Ref: 1471a

+44 (0) 330 999 0019
sales@firechiefglobal.com
firechiefglobal.com

# FIRECHIEF 9V BATTERY SMOKE DETECTOR

FIRECHIEF®
making the world a safer place

This smoke detector, can send out sound and light alarm signal in the early stage of a fire if properly installed and maintained, in that case it will have extra time to control the fire or to evacuate at once. The product is designed for household or similar residential application use.


## MODEL:
## FBSD1



FBSD1
117-1098

## Specifications

| Model | FBSD1 |
|---|---|
| Product Code | 117-1098 |
| Standard | EN 14604:2005/AC:2008 |
| Voltage | DC 9V |
| Standby current | <10uA |
| Alarm current | <30mA |
| Sensor type | Photoelectric |
| Temperature | 0°C - +40°C |
| Ambient humidity | <95%R.H |
| Alarm indication | Red LED & Buzzer |
| Sound pressure | >85dB (around 3m) |
| N.W. | 89g (not inclu. battery) |
| Dimensions | Φ100* 36.7mm |
| Installation Way | Ceiling mounting |

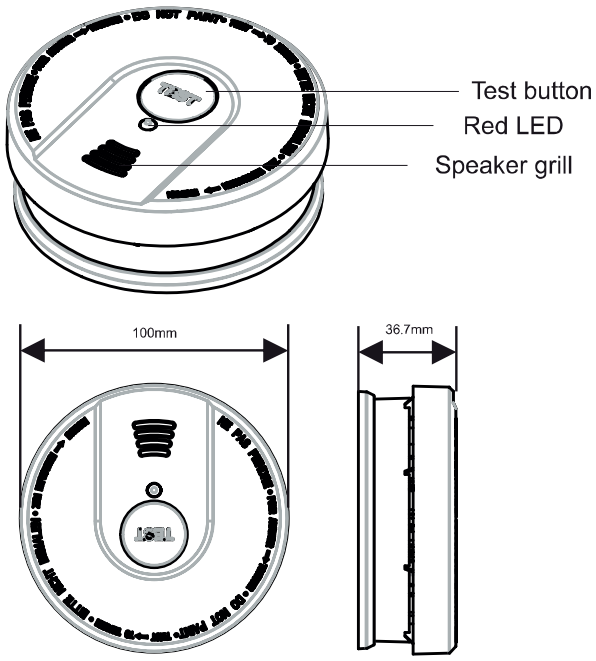


**For more information contact:** Firechief Global, 3 Lands End Way, Oakham, Rutland, UK, LE15 6RB | **Imported into EU by:** Sentura Group (Ireland) Ltd, Joyce House, 21-23 Holles Street, Dublin 2, Ireland

+44 (0) 330 999 0019 sales@firechiefglobal.com W firechiefglobal.com

Issued: v1 Feb 21